

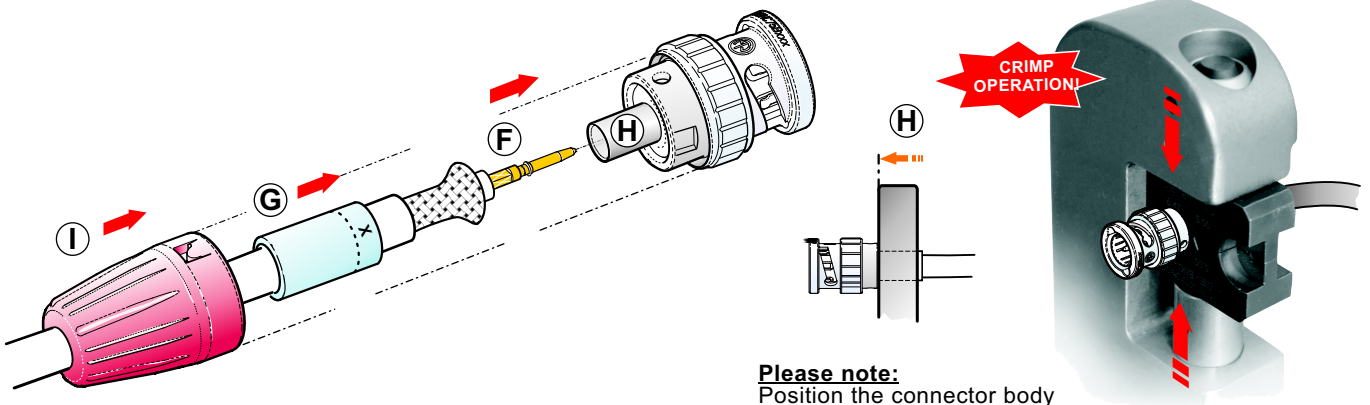
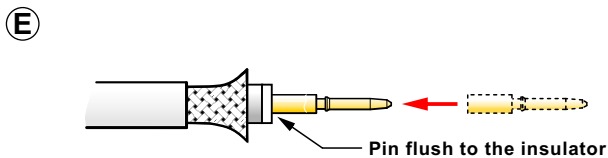
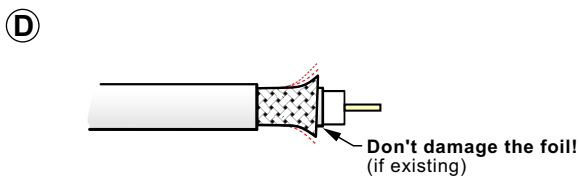


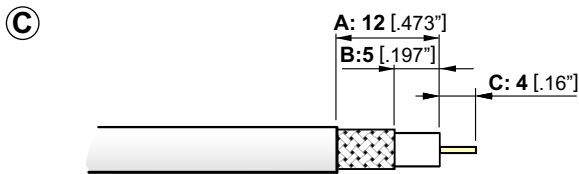


# ASSEMBLY INSTRUCTION

## rearTWIST BNC | 75 Cable Connector - Crimp version

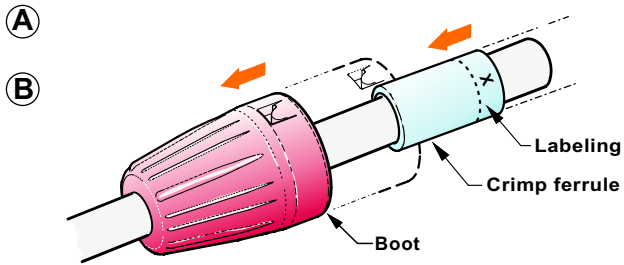

Assembled Connector

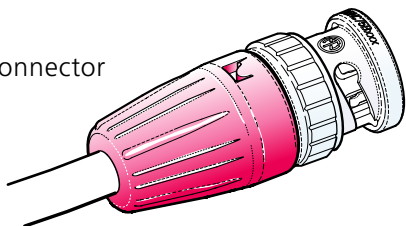

**A** Slide the boot onto the cable  
- Position the labeling to the cable end

**B** Slide the crimp ferrule onto the cable

**C** Prepare cable as shown  
- Use an adjustable coaxial cable stripper

**D** Spread the braided shield  
*(It's easily with the NEUTRIK® "SHIELD-SPREADING-TOOL"!)*

**E** Crimp the pin  
- position the pin on the center conductor  
- Crimp the pin with the tool  
*(For best crimping-results it is recommended to use the original Neutrik crimp tool  
- HXBNC with the corresponding insert or hexcrimp acc. to IEC 803-W (SW 1.7) or squarecrimp acc. to IEC 803-2 (SW 1.6)  
- Pin can also be soldered (Optional)!  
- Straighten the pin if misaligned.)*

**F** Insert the cable into the connector body

**G** Slide the crimp ferrule over the shield to the front and push the cable to its end position until you hear a snap noise.

**H** Crimp the ferrule with the tool  
*(For best crimping-results it is recommended to use the original Neutrik tool - HXBNC with the corresponding insert)*

**I** Snap the boot onto the connector body

**Please note:**  
Position the connector body  
Flush with the die face.

NEUTRIK AG LI T: +423 / 237 24 24 F: +423 / 232 53 93  
NEUTRIK USA Inc. USA T: +1 704 / 972 3050 F: +1 704 / 438 9202  
NEUTRIK (UK) Ltd. UK T: +44 1983 / 811 441 F: +44 1983 / 811 439  
NEUTRIK Vertriebs GmbH DE/NL/AT/DK T: +49 8131 / 280 890 F: +49 8131 / 280 830

NEUTRIK France FR T: +33 1 / 4131 6750 F: +33 1 / 4131 0511  
NEUTRIK Tokyo Ltd. JP T: +81 3 / 3663 4733 F: +81 3 / 3663 4796  
NEUTRIK Hong Kong Ltd. HK T: +852 / 2687 6055 F: +852 / 2687 6052

Draft. Nr.: BDA 076 / 3102M0771 | Update: 17.02.2012 | Data subject to change without prior notice. ©2012 NEUTRIK®. ALL RIGHTS RESERVED. NEUTRIK® are registered trademark.